



# DRYING

## HEAT PUMP DRYERS ADVANCE+ SR-11/16/23 TP2 PLUS HP

### CHARACTERISTICS

#### TP2

- User friendly and totally programmable Touch II with 7" coloured touch screen.
- USB Connection. PC software free of charge for programming, traceability, data analysis...
- Videos on display (ads, instructions, etc.)
- 37 languages

#### OUTSTANDING FEATURES

- Reversing drum action as standard
- Stainless steel drum as standard
- Frequency inverter as standard

#### EFFICIENCY

- MIXED FLOW - Mixed axial-radial airflow
- Big fluff filter
- Double door glass

#### VERSATILITY

- Make to order - customisation
- WET CLEANING
- OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses

#### ERGONOMICS

- Drawer as fluff filter, made of stainless steel
- Biggest door diameters
- Opening sense of door adjustable on site

#### MAINTENANCE

- Hinged panel: easy and ergonomic access
- Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance

#### OTROS

- Grey skinplate outer casing, stainless steel look
- iDRY - new drum with stamped holes
- COOL DOWN - anti-wrinkle at the end of the cycle
- No need of exhaust to the exterior
- Low energy consumption
- Water to refrigerate, which may be reused to wash
- CE approved

#### OPTIONS

- Opposite door opening
- Tropicalized model
- New dosing/vaporizing system
- Back pannel with air filter
- FagorKconnect-IoT Communication kit
- Rear panel external air + filter
- Stainless steel outercasing
- Stainless steel frontal panel
- Maritime wooden packing
- Ship voltage for electric models: 440V III 50/60 Hz No neutral



# TECHNICAL DATA


## HEAT PUMP DRYERS | ADVANCE+ | SR-11/16/23 TP2 PLUS HP

TECHNICAL DATA	UNIT.	SR-11 TP2 PLUS HP	SR-16 TP2 PLUS HP	SR-23 TP2 PLUS HP
<b>CAPACITY</b>				
Capacity 1/18	Kg	12	18	26
Capacity 1/20	Kg	11	17	23
Hourly Output*	Kg/h	16	20	22
Evaporation capacity*	l/h	7,5	9,5	11,5
<b>DRUM</b>				
Ø Drum	mm	750	750	855
Drum length	mm	475	746	800
Drum volume	l	210	330	460
Ø Loading door	mm	574	574	574
<b>POWER</b>				
Drum motor power	kW	0,37	0,37	0,37
Fan motor power	kW	0,55	0,55	0,55
Electric heating power	kW	3,8 + 4***	3,8 + 4***	3,8 + 4***
Total electric power (elec.model)	kW	8,77	8,77	8,77
Energetic consumption	** kWh/ l	1,28	1,17	1,05
Nominal airflow	m3/h	1.200	1.200	1.200
<b>CONNECTIONS</b>		<b>ELECTRICAL</b>	<b>ELECTRICAL</b>	<b>ELECTRICAL</b>
Tension 400V - III + N + T (50 Hz)	N° x mm2 / A	5 x 4 / 20	5 x 4 / 20	5 x 4 / 20
Heat pump inlet (Cooling)	BSP	1/2 "	1/2 "	1/2 "
Heat pump outlet (Cooling)	BSP	1/2 "	1/2 "	1/2 "
Drain	BSP	3/4 "	3/4 "	3/4 "
<b>DIMENSIONS / PACKING DIMENSIONS</b>				
Net width / Gross width	mm	785 / 865	785 / 865	890/970
Net Depth / Gross Depth	mm	1.255/ 1.380	1.525 / 1.650	1.590/1.720
Net Height / Gross Height	mm	1.694 / 1.840	1.694 / 1.840	1.812 / 1.940
Net weight / Gross weight	Kg	342 / 356	357/ 372	380/395
<b>OTHERS</b>				
Sound level	dB	64	64	64

\* It may vary depending on the type of heating, filter cleanliness or extraction type

\*\* kWh per litre of evaporated water

\*\*\* Compressor + resistances

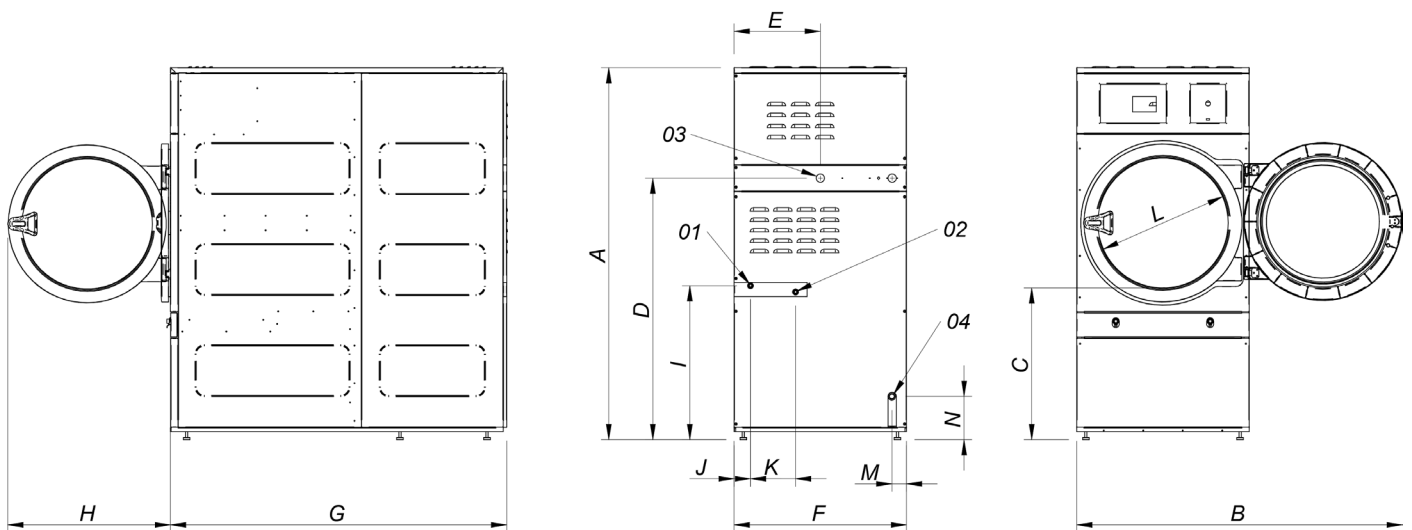

- 01 REFRIGERATION WATER INLET 1/2"
- 02 REFRIGERATION WATER OUTLET (HOT) 1/2"
- 03 ELECTRIC CONNECTION
- 04 DRAIN 3/4"

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
SR-11 TP2 PLUS HP	1694	1447	689	1190	392	785	1255	735	700	75	205	575	67	197
SR-16 TP2 PLUS HP	1694	1447	689	1190	392	785	1525	735	700	75	205	575	67	197
SR-23 TP2 PLUS HP	1812	1552	743	1190	445	890	1595	735	700	127	205	575	119	250