



WASHING

NORMAL SPIN WASHERS LOW AND MEDIUM CAPACITY LN-11/14 TP2



CHARACTERISTICS

TP2

- User friendly and totally programmable 7"
- USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.
- Videos on display (ads, instructions, etc.)
- 37 languages
- 8 dosing signals as standard 8 dosing

G FACTOR

- High G-Factor of 200

EFFICIENCY

- Intelligent consumption
- Optimal loading
- Low water consumption

VERSATILITY

- Make to order: customisation
- OPL < > COIN
- Electric < > Hot water
- Wet cleaning features

CONNECTIVITY

- IoT - FagorKonnect
- Remote technical service
- Management of laundries: OPL and selfservice
- Remote payment

ERGONOMICS

- Biggest door diameters: Ø373
- Easy opening/closing system for door lock

MAINTENANCE

- Hinged control panel: easy and ergonomic access.
- Equivalent parts for all models: contactors, electronic devices,...
- Technical menu: telemetry, error diagnosis.

OTHERS


- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304
- 3 water inlets.
- CB and WRAS approved product
- Option ETL

OPTIONS

- DQ-2 Dosing pump kit
- Extra dosing pump DB-1
- SLUICE: model with 8mm drum holes
- Anchoring base
- External double drain 3"
- Normally closed valve
- Water FULL FLOW: recirculation of bath water
- Relay card with 6 extra dosing signals: up to 14 signals
- Silicone gasket
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Coin / token kit
- Auto unlock kit for the door.

		U.	LN-11 TP2	LN-14 TP2		
DRUM						
Load capacity 1:9 / 1:10		Kg	11/10	14/13		
Volume		l	100	130		
Diameter		mm	620	620		
Depth		mm	330	430		
GENERAL DETAILS						
Washing speed/ Spinning speed		r.p.m.	53/759	53/759		
Factor G		-	200	200		
Maximum force transmitted		KN	2,0 ±3	2,31 ±4		
Frequency-dynamic force		Hz	8,93	8,93		
Noise level		dB	<70	<70		
Coin laundry version		-	Yes	Yes		
Double drain		-	No	Opt		
Weighing system / Tilting system		-	No/No	No/No		
SLUICE option		-	Yes	Yes		
DOOR						
Height center door/ Height door		mm	570/310	570/310		
Diameter		mm	373	373		
POWER						
Motor		kW	1,1	1,1		
Electric heating power		kW	6	9		
Total electric power (electric model)		kW	6,25	9,5		
Total electric power (hw, steammodel)		kW	1,1	1,1		
CONNECTIONS			ELECTRICAL	STEAM / HOT WATER	ELECTRICAL	STEAM / HOT WATER
Tensión 230V- I + N + T	Nº x mm2 / A	2x6+T / 40A	2x1,5+T / 16A	2x10+T / 50A	2x1,5+T / 16A	
Tensión 230V- III + T	Nº x mm2 / A	3x2,5+T / 20A	-	3x2,5+T / 20A	-	
Tensión 400V- III + N + T	Nº x mm2 / A	4x1,5+T / 16A	-	4x1,5+T / 16A	-	
Steam inlet (Steam model)	inch	1/2"		1/2"		
Maximum steam consumption (Steam model)	Kg/h	7		8,5		
Water inlet	inch	3/4"		3/4"		
Water main pressure	Kgs/cm ²	2-4		2-4		
Maximum water consumption	Lit/h	62*/82**		80,6*/106.6**		
Drain	inch	3"		3"		
Drainage capacity	Lit/min	200		200		
DIMENSIONS / PACKING DIMENSIONS						
Net Width / Gross Width	mm	719/800			719/800	
Net Depth / Gross Depth	mm	684/850			830/990	
Net Height / Gross Height	mm	1.158/1.350			1.158/1.350	
Net weight / Gross weight	kg	217/225			239/247	
Volume	m ³	1,07			1,07	

* ECO program / **Energetic 60°C

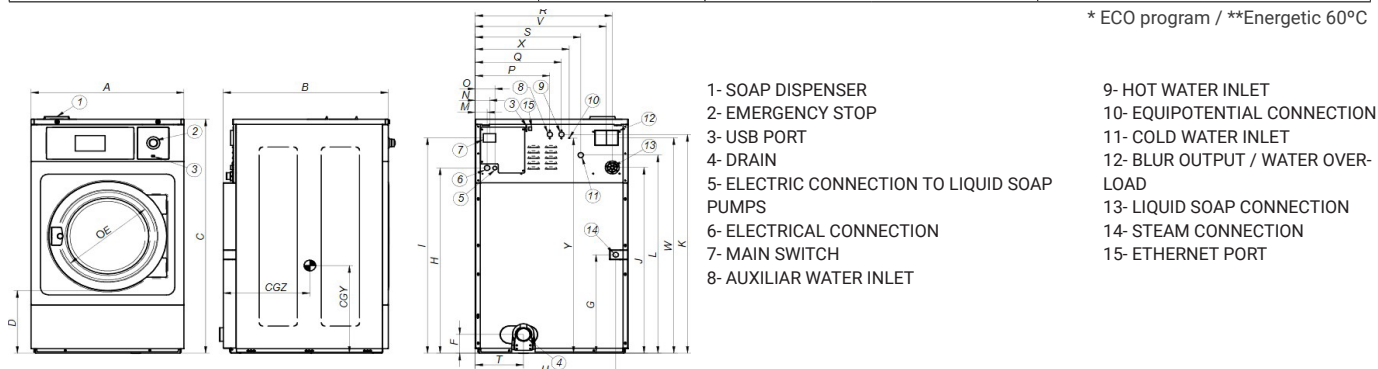

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ	
LN-11	mm	719	697	1.158	310	373	144	440	886	1.054	889	1.073	958	61	74	101	316	376	637	475	211	654	607	1.053	416	1.053	383	511
LN-14	mm	719	840	1.158	310	373	144	440	886	1.054	889	1.073	958	61	74	101	316	376	637	475	211	654	607	1.053	416	1.053	484	524



WASHING

NORMAL SPIN WASHERS LOW AND MEDIUM CAPACITY LN-18/22 TP2



CHARACTERISTICS

TP2

- User friendly and totally programmable 7"
- USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.
- Videos on display (ads, instructions, etc.)
- 37 languages.
- 8 dosing signals as standard.

G FACTOR

- G-FACTOR 200

EFFICIENCY

- Intelligent consumption
- Optimal loading
- Low water consumption

VERSATILITY

- Make to order: customisation
- OPL < > COIN
- Electric < > Hot water
- Wet cleaning features

CONNECTIVITY

- IoT - FagorKconnect
- Remote technical service
- Management of laundries: OPL and COIN
- Remote payment

ERGONOMICS

- Biggest door diameters: Ø460
- Easy opening/closing system for door lock

MAINTENANCE

- Hinged panel: easy access to parts
- Equivalent parts for all models: contactors, electronic devices, gear
- Technical menu: traceability, error diagnosis

OTHERS


- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304
- 3 water inlets.
- CB and WRAS approved product
- Option ETL

OPTIONS

- DQ-2 Dosing pump kit
- Extra dosing pump DB-1
- SLUICE: model with 8mm drum holes
- Anchoring base
- Double drain
- Normally closed valve
- Water RE-CYCLE: recirculation of bath water
- Relay card with 6 extra dosing signals: up to 14 signals
- Silicone gasket
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Coin / token kit
- Auto unlock kit for the door.

	U.	LN-18 TP2	LN-22 TP2		
DRUM					
Load capacity 1:9 / 1:10	Kg	20/18	25/22		
Volume	l	180	220		
Diameter	mm	700	700		
Depth	mm	470	560		
GENERAL DETAILS					
Washing speed / Spining speed	r.p.m.	50/714	50/714		
G Factor	-	200	200		
Maximum force transmitted	KN	2,63 ±5	3,04 ±5		
Frequency-dynamic force	Hz	8,42	8,42		
Noise level	dB	<70	<70		
Coin laundry version	-	Yes	Yes		
Double drain	-	Opt	Opt		
Weighing System / Tilting System	-	No	No		
Option SLUICE	-	Yes	Yes		
DOOR					
Height center door / Height door	mm	655/348	655/348		
Diameter	mm	460	460		
POWER					
Motor	kW	2,2	2,2		
Electric heating power	kW	12	12		
Total electric power (electric model)	kW	12,75	12,75		
Total electric power (hw, steam model)	kW	2,2	2,2		
CONNECTIONS		ELECTRIC	STEAM / HOT WATER.	ELECTRIC	STEAM / HOT WATER.
Tension 230V - I + N + T	N° x mm2 / A	2x16+T / 63A	2x4+T / 32A	2x16+T / 63A	2x4+T / 32A
Tension 230V - III + T	N° x mm2 / A	3x6+T / 40A	-	3x6+T / 40A	-
Tension 400V - III + N + T	N° x mm2 / A	4x4+T / 32A	-	4x4+T / 32A	-
Steam inlet (Steam model)	inch	1/2"		1/2"	
Maximum steam consumption (Steam model)	Kg/h	12		12	
Water inlet	inch	3/4"		3/4"	
Water main pressure	Kgs/cm ²	2-4		2-4	
Maximum water consumption	Lit/h	111,6*/147,6**		136,4*/180,4**	
Drain	inch	3"		3"	
Drainage capacity	Lit/min	200		200	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	788/850		788/880	
Net Depth / Gross Depth	mm	840/1.040		950/1.140	
Net Height / Gross Height	mm	1.307/1.500		1.307/1.500	
Net weight / Gross weight	kg	281/301		300/320	
Volume	m3	1,3		1,5	

* ECO program / **Energetic 60°C

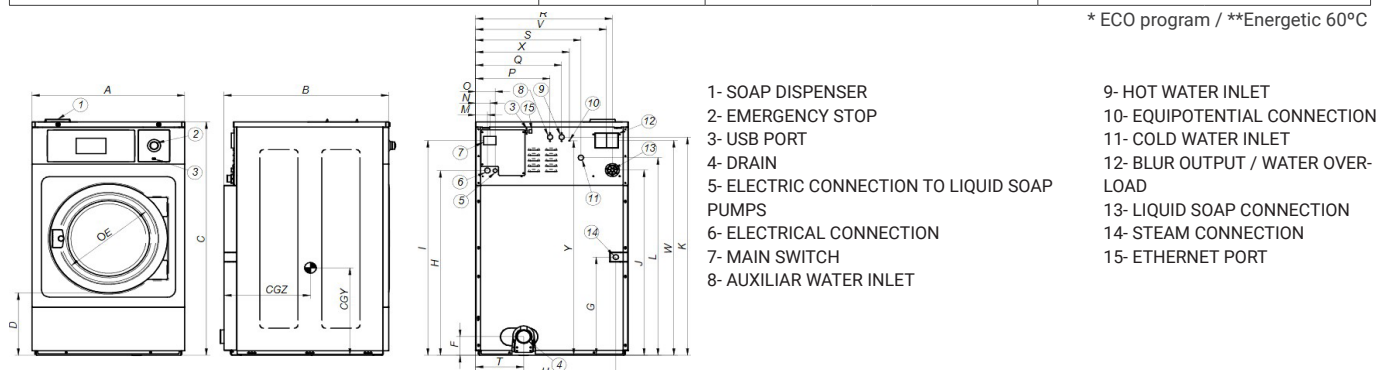

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ	
LN-18	mm	788	850	1.307	348	450	115	552	1.035	1.203	1.038	1.222	1.107	61	74	101	385	445	706	544	249	724	676	1.202	485	1.202	479	546
LN-22	mm	788	950	1307	348	460	115	552	1035	1203	1038	1222	1107	61	74	101	385	445	706	544	249	724	676	1202	485	1202	479	586



WASHING

NORMAL SPIN WASHERS LOW AND MEDIUM CAPACITY LN-28 TP2



CHARACTERISTICS

TP2

- User friendly and totally programmable 7"
- USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.
- Videos on display (ads, instructions, etc.)
- 37 languages. 8 dosing signals as standard.
- 8 dosing signals as standard

G FACTOR

- G-FACTOR 200

EFFICIENCY

- Intelligent consumption
- Optimal loading
- Low water consumption

VERSATILITY

- Make to order: customisation
- OPL < > COIN
- Electric < > Hot water
- Wet cleaning features

CONNECTIVITY

- IoT - FagorKonnect
- Remote technical service
- Management of laundries: OPL and COIN
- Remote payment

ERGONOMICS

- Biggest door diameters: Ø460
- Easy opening/closing system for door lock

MAINTENANCE

- Hinged control panel: easy and ergonomic access.
- Equivalent parts for all models: contactors, electronic devices,...
- Technical menu: telemetry, error diagnosis.


OTHERS

- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304
- 3 water inlets.
- CB and WRAS approved product
- Option ETL

OPTIONS

- DQ-2 Dosing pump kit
- Extra dosing pump DB-1
- SLUICE: model with 8mm drum holes
- Anchoring base
- Double drain
- Normally closed valve
- Water RE-CYCLE: recirculation of bath water
- Relay card with 6 extra dosing signals: up to 14 signals
- Silicone gasket
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Coin / token kit
- Auto unlock kit for the door.

		U.	LN-28 TP2
DRUM			
Load capacity 1:9 / 1:10		Kg	31/28
Volume		l	280
Diameter		mm	770
Depth		mm	585
GENERAL DETAILS			
Washing speed / Spining speed		r.p.m.	48/682
G Factor		-	200
Maximum force transmitted		KN	3,68 ± 6
Frequency-dynamic force		Hz	8,02
Noise level		dB	<70
Coin laundry version		-	Yes
Double drain		-	Opt
Weighing System / Tilting System		-	No/No
SLUICE option		-	Yes
DOOR			
Height center door / Height door		mm	700/400
Diameter		mm	460
POWER			
Motor		kW	4
Electric heating power		kW	18
Total electric power (electric model)		kW	19,2
Total electric power (hw, steam model)		kW	4
CONNECTIONS			ELECTRIC STEAM / HOT WATER.
Tension 230V - I + N + T	N° x mm ² / A	-	2x4+T / 32A
Tension 230V - III + T	N° x mm ² / A	3x16+T / 63A	-
Tension 400V - III + N + T	N° x mm ² / A	4x4+T / 32A	-
Steam inlet (Steam model)	inch	3/4"	
Maximum steam consumption (Steam model)	Kg/h	15	
Water inlet	inch	3/4"	
Water main pressure	Kgs/cm ²	2-4	
Maximum water consumption	Lit/h	173,6*/229,6**	
Drain	inch	3"	
Drainage capacity	Lit/min	200	
DIMENSIONS / PACKING DIMENSIONS			
Net Width / Gross Width	mm	884/930	
Net Depth / Gross Depth	mm	1.070/1.260	
Net Height / Gross Height	mm	1.340/1.523	
Net weight / Gross weight	kg	365/395	
Volume	m ³	1,8	

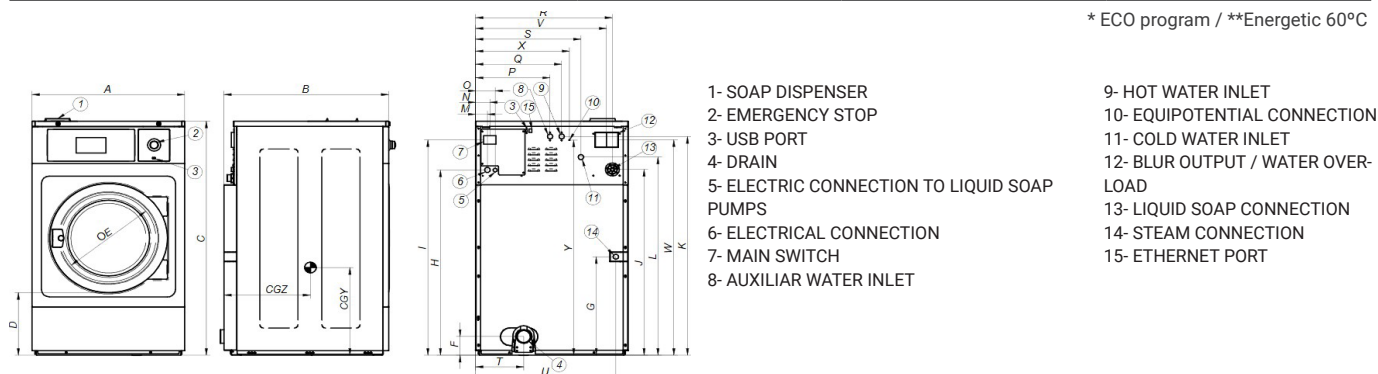

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ	
LN-28	mm	884	1070	1330	400	460	145	548	1063	1230	1065	1250	1135	61	74	101	430	510	801	640	268	820	772	1220	570	1210	591	593



WASHING

NORMAL SPIN WASHERS LOW AND MEDIUM CAPACITY LN-35C/45C TP2



CHARACTERISTICS

TP2

- User friendly and totally programmable 7" TP2 touch screen
- USB Connection. PC software free of charge for programming, traceability, data analysis...
- Videos on display (ads, instructions)
- 37 languages
- 8 dosing signals as standard

G FACTOR

- G-FACTOR 200

EFFICIENCY

- Intelligent consumption
- Optimal loading
- Water Recovery tanks ready: KRS
- Low water consumption

VERSATILITY

- Make to order: customisation
- OPL < > COIN
- Electric < > Hot water
- Wet cleaning features

CONNECTIVITY

- Remote technical service
- Management of laundries: OPL and selfservice
- Remote payment

ERGONOMICS

- Biggest door diameters: Ø560 (for LN-35C/45C)
- Easy opening/closing system for door lock

MAINTENANCE

- Hinged panel: easy access to parts
- Equivalent parts for all models: contactors, electronic devices, gear
- Technical menu: traceability, error diagnosis

OTHERS


- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304
- 3 water inlets.
- CB and WRAS approved product
- Option ETL

OPTIONS

- Double drain
- Normally closed valve
- Silicon gasket (for LN-35)
- WaterFULL FLOW recirculation of bath water
- Relay card with 6 extra dosing signals: up to 14 signals
- Printer
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Stainless steel outer casing
- Stainless steel front panel
- SLUICE: model with 8mm drum holes (for LN-35C/45C)
- Anchoring base
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Coin / token kit
- Delayed door opening in case of power outage

	U.	LN-35C TP2	LN-45C TP2		
DRUM					
Load capacity 1:9 / 1:10	Kg	39/35	49/45		
Volume	l	350	450		
Diameter	mm	860	860		
Depth	mm	602	720		
GENERAL DETAILS					
Washing speed / Spining speed	r.p.m.	45/644	45/644		
G Factor	-	200	200		
Maximum force transmitted	KN	4,59 ±8	5,9 ±8		
Frequency-dynamic force	Hz	7,58	7,58		
Noise level	dB	<70	<70		
Coin laundry version	-	Yes	Yes		
Double drain	-	Opt	Opt		
Weighing system / Tilting system	-	No/No	No/No		
SLUICE Version	-	Yes	Yes		
DOOR					
Height center door / Height door	mm	735/440	735/440		
Diameter	mm	560	560		
POWER					
Motor	kW	4	6		
Electric heating power	kW	21	21		
Total electric power (electric model)	kW	22	22		
Total electric power (hw, steam model)	kW	4	6		
CONNECTIONS		ELECTRIC	STEAM / HOT WATER	ELECTRIC	STEAM / HOT WATER
Tension 230V- I + N + T	N° x mm2 / A	-	2x4+T / 32A	-	-
Tension 230V- III + T		3x16+T/63A	-	3x16+T / 63A	3x4+T / 32A
Tension 400V- III + N + T		4 x6+T / 40A	-	4x6+T / 40A	4x4+T / 32A
Steam inlet (Steam model)	inch	3/4"		3/4"	
Maximum steam consumption (Steam model)	Kg/h	18		21	
Water inlet	inch	3/4"		3/4"	
Water main pressure	Kgs/cm ²	2-4		2-4	
Maximum water consump.	Lit/h	217*/287**		279*/369**	
Drain	inch	3"		3"	
Drainage capacity	Lit/min	200		200	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	979/1.050		979/1.050	
Net Depth / Gross Depth	mm	1.066/1.250		1.255/1.440	
Net Height / Gross Height	mm	1.411/1.600		1.411/1.640	
Net weight / Gross weight	kg	473/503		600/670	
Volume	m3	2,1		2,5	

* ECO program / **Energetic 60°C

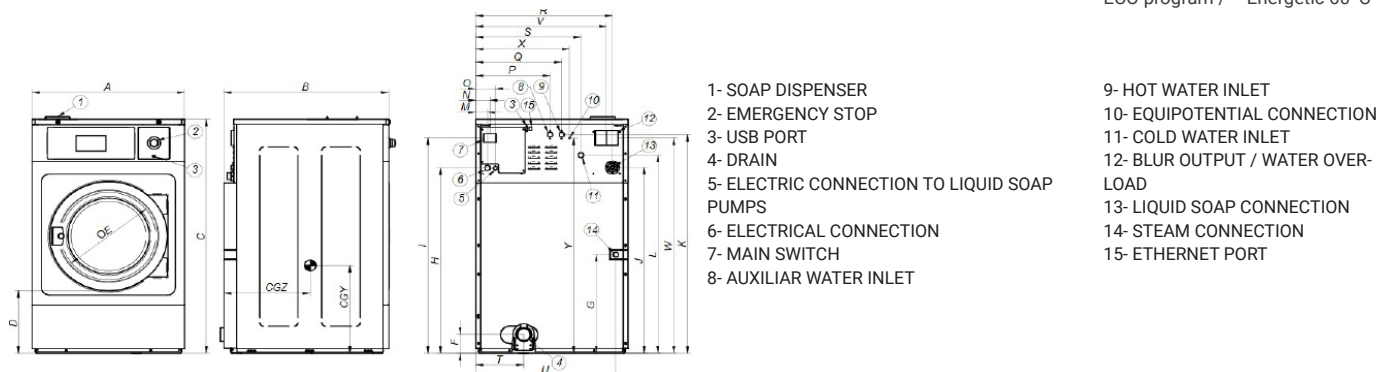

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ	
LN-35C	mm	979	1.065	1.411	370	560	147	623	1.139	1.307	1.116	1.322	1.211	61	74	101	545	625	885	715	262	917	855	1.281	760	1.373	635	682
LN-45C	mm	979	1.185	1.411	370	560	147	623	1.139	1.307	1.116	1.322	1.211	61	74	101	545	625	885	715	262	917	855	1.281	760	1.373	635	760



WASHING

NORMAL SPIN WASHER EXTRACTORS HIGH CAPACITY LN-60C/80C TP2

CHARACTERISTICS

TP2

- User friendly and totally programmable 7"
- USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.
- Videos on display (ads, instructions, etc.)
- 37 languages. 8 dosing signals as standard.
- 8 dosing signals as standard

G FACTOR

- High G-Factor 150.

EFFICIENCY

- Intelligent consumption.
- Optimal loading.
- Low water consumption.

VERSATILITY

- Make to order: customisation
- OPL < > COIN
- Electric < > Hot water.
- WET CLEANING features as standard

CONNECTIVITY

- IoT - FagorKonnect
- Remote technical service.
- Management of laundries: OPL.
- Remote payment

ERGONOMICS

- Big door diameters: Ø 560 mm.
- Easy opening/closing system for door lock.

MAINTENANCE

- Hinged control panel: easy and ergonomic access.
- Equivalent parts for all models:

- contactors, electronic devices,...
- Technical menu: telemetry, error diagnosis.diagnosis.

OTHERS

- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304
- 3 water inlets (Water inlet hoses not included)
- CB and WRAS approved product
Option ETL


OPTIONS

- DQ-2 Dosing pump kit
- Extra dosing pump DB-1
- SLUICE: model with 8mm drum holes
- Anchoring base
- Double drain
- Normally closed valve
- Water inlet hose
- Relay card with 6 extra dosing signals: up to 14 signals
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Coin / token kit
- Auto unlock kit for the door.
- Stainless steel AISI 304 outer casing.
- Front soap dispenser.



	U.	LN-60C TP2	LN-80C TP2		
DRUM					
Load capacity 1:9 / 1:10	Kg	66 / 60	88 / 80		
Volume	l	600	800		
Diameter	mm	1.048	1.048		
Depth	mm	684	936		
GENERAL DETAILS					
Washing speed / Spining speed	r.p.m.	42,5 / 505	42,5 / 505		
G Factor	-	150	150		
Maximum force transmitted	KN	9,12 ± 15	10,07 ± 17		
Frequency-dynamic force	Hz	6,93	6,93		
Noise level	dB	< 70	< 70		
Coin laundry version	-	Yes	Yes		
Double drain	-	Opt	Opt		
Weighing system / Tilting system	-	No	No		
SLUICE option		Yes	Yes		
DOOR					
Height door center / door base	mm	900 / 540	900 / 540		
Diameter	mm	560	560		
POWER					
Motor	kW	5,5	7,5		
Electric heating power	kW	36	48/36		
Total electric power (electric model)	kW	38	50,5/38,5		
Total electric power (hot water, steam)	kW	5,5	7,5		
CONNECTIONS		ELECTRIC	STEAM/HOT WATER	ELECTRIC	STEAM/HOT WATER
Tension 230V - III + T	N° x mm2 / A	3x25+T / 100A	3x10+T / 50A	3x50+T / 160A	3x10+T / 50A
Tension 400V - III + N + T	N° x mm2 / A	4x16+T / 63A	4x10+T / 50A	4x25+T / 80A	4x10+T / 50A
Steam inlet (Steam model)	Inch	3/4"		3/4"	
Max. steam consumption (Steam model)	Kg/h	21		21	
Water inlet	Inch	1"		1"	
Water main pressure	Kgs/cm2	2-4		2-4	
Maximum water consumption	Lit/h	372*/492**		496/656**	
Drain	Inch	3"		3"	
Drainage capacity	Lit/min	200		200	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	1.225 / 1.335		1.225 / 1.335	
Net Depth / Gross Depth	mm	1.279 / 1.440		1.492 / 1.660	
Net Height / Gross Height	mm	1.640 / 1.860		1.640 / 1.860	
Net weight / Gross weight	kg	930 / 1.050		1.000 / 1.120	
Volume	m3	3,73		4,12	

* ECO program / **Energetic 60°C

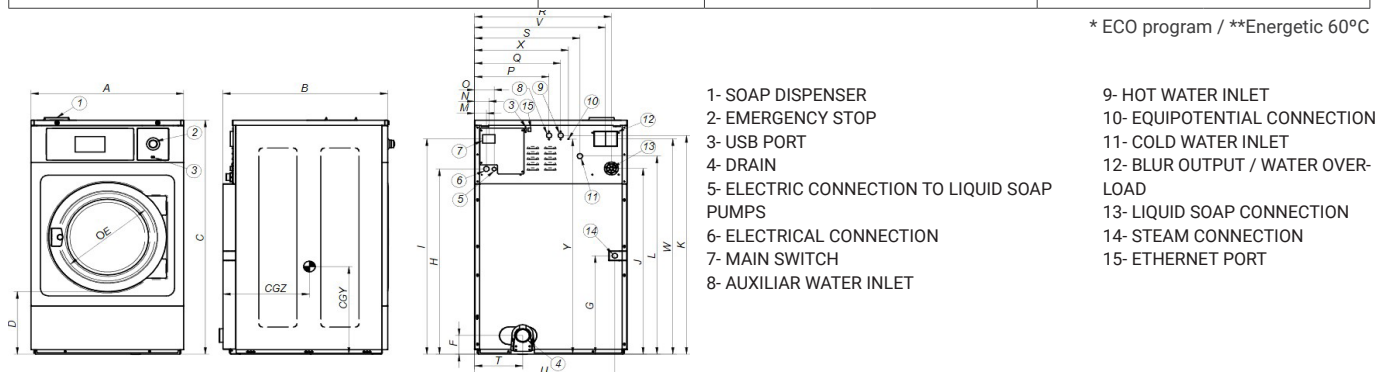

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y
LN-60C	1225	1279	1640	540	560	140	984	1368	1536	1306	1551	1318	61	74	101	651	731	1110	869	270	1163	1080	1470	992	1595
LN-80C	1225	1493	1640	540	560	140	984	1368	1536	1306	1551	1318	61	74	101	651	731	1110	869	270	1163	1080	1470	992	1595