


# DRYING

## STACK DRYERS ECONOMIC LINE SC-2-22 M

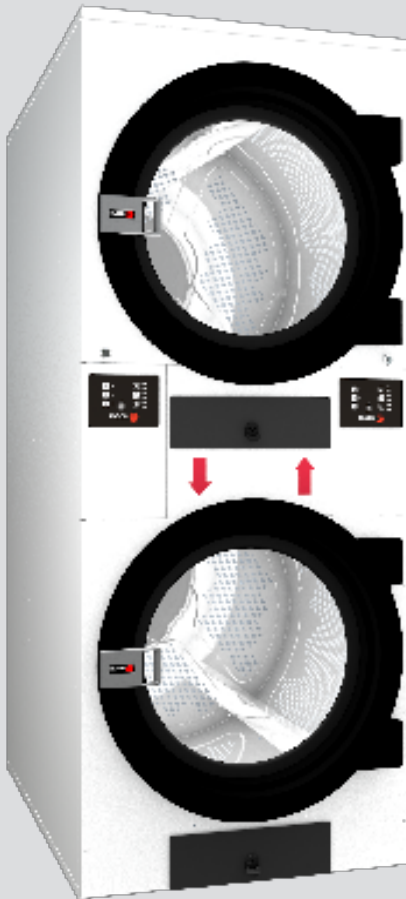

### CHARACTERISTICS

#### M PROGRAMMER

- New M programmer: push buttons to control temperature and time.

#### OUTSTANDING FEATURES

- Reversing drum action as standard.
- Frequency inverter as standard.
- Galvanized drum as standard.

#### VERSATILITY

- Make to order - customisation.
- OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses.

#### ERGONOMICS

- Drawer as fluff filter, made of stainless steel.
- Biggest door diameters.

#### MAINTENANCE

- Hinged panel: easy and ergonomic access.
- Technical menu: statistics for technicians and maintenance with external console (with console option).


#### OTHERS

- COOL DOWN - anti-wrinkle at the end of the cycle.
- Heating options: electric, gas and steam.
- CE approved.

### OPTIONS


- Screen in M programmer (2 units).
- Fluff filter with grid 0,3 mm (standard in STACK is 0,6 mm).
- Ship voltage for electric models: 440V III 50/60 Hz No neutral
- Other voltages available

TECHNICAL DATA	UNIT.	SC-2-22 M
<b>CAPACITY</b>		
Capacity 1/18	Kg	48
Capacity 1/20	Kg	44
Hourly Output (gas)	Kg/h	88
Evaporation capacity (gas)	l/h	44
<b>DRUM</b>		
Ø Drum	mm	835
Ø Door	mm	574
Door center height	mm	547/1.618
Load hole bottom height	mm	272/1.322
Drum length	mm	800
Drum volume	l	438
<b>POWER</b>		
Drum motor power	Kw	0,37x2
Fan motor power	Kw	0,55x2
Electric heating power	Kw	-
Total electric power (elec.model)	Kw	-
Gas heating power	Kw	30,4x2
Instant propane gas consumption (G31)	Kg/h	1,03 x 2
Instant natural gas consumption (G20)	m3/h	1,27 x 2
Total electric power (gas model)	Kw	1,94
<b>CONNECTIONS</b>		<b>GAS</b>
Tension 230V - I + N + T	Nº x mm2 / A	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	-
Tension 400V - III + N + T	Nº x mm2 / A	-
Ø Gas inlet	BSP	3/4"
<b>DIMENSIONS / PACKING DIMENSIONS</b>		
Net width / Gross width	mm	870 / 950
Net Depth / Gross Depth	mm	1.328 / 1.411
Net Height / Gross Height	mm	2.117 / 2.250
Net weight / Gross weight	Kg	PENDIENTE
<b>OTHERS</b>		
Max airflow	m3/h	900x2
Ø Fume exhaust	mm	250
Sound level	dB	69

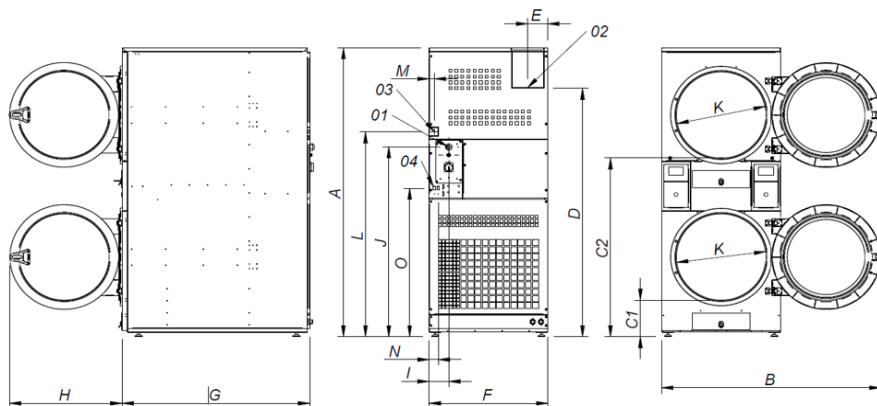


01 ELECTRIC CONNECTION  
02 FUMES OUTPUT Ø200  
03 GAS INLET 1/2"  
04 ETHERNET CONNECTION  
(ONLY TOUCH CONTROL)

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O
SC-2-22 TP2	2118	1490	286	1330	1940	149	870	1312	735	73	320	575	250	70	45	1416



# DRYING

## STACK DRYERS POWERED SR/SC-2-18 TP2/M POWERED

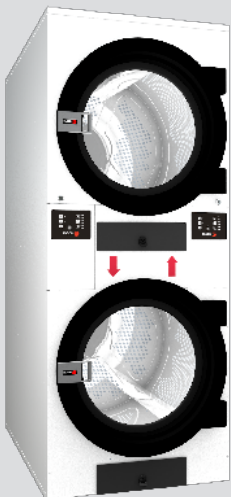

### CHARACTERISTICS

#### SR-2-18 TP2 POWERED

- User friendly and totally programmable 7" TP2
- Reversing drum action as standard
- Stainless steel drum as standard
- New POWERED gas heated model: more power to achieve more productivity.
- OPL > Multivending
- IoT FagorKconnect

#### SR-2-18 M POWERED

- New M programmer: push buttons to control temperature and time
- Reversing drum action as standard
- Stainless steel drum as standard
- New POWERED gas heated model: more power to achieve more productivity.
- OPL > Multivending

#### SC-2-18 M POWERED

- New M programmer: push buttons to control temperature and time
- Reversing drum action as standard
- Galvanized drum as standard
- New TURBO gas heated model: more power to achieve more productivity.
- OPL > Multivending

### OPTIONS

#### SR-2-18 TP2 POWERED

- iDRY - Intelligent humidity control.

#### SR-2-18 M POWERED


- Screen in M programmer

#### SC-2-18 M POWERED

- Screen in M programmer

TECHNICAL DATA	UNIT	SR-2-18 TP2 POWERED	SR-2-18 M POWERED	SC-2-18 M POWERED			
<b>CAPACITY</b>							
Capacity 1/18	Kg	37	37	37			
Capacity 1/20	Kg	34	34	34			
Hourly Output (gas)*	Kg/h	35,3	35,3	35,3			
Evaporation capacity (gas)*	l/h	70,7	70,7	70,7			
<b>DRUM</b>							
Ø Drum	mm	750	750	750			
Ø Door	mm	574	574	574			
Door center height	mm	547 / 1.522	547 / 1.522	547/1522			
Load hole bottom height	mm	260 / 1.235	260 / 1.235	260/1235			
Drum length	mm	746	746	746			
Drum volume	l	330	330	330			
<b>POWER</b>							
Drum motor power	Kw	0,37x2	0,37x2	0,37x2			
Fan motor power	Kw	0,55x2	0,55x2	0,55x2			
Electric heating power	Kw	-	-	-			
Total electric power (elec.model)	Kw	-	-	-			
Gas heating power	Kw	24x2	24x2	24x2			
Total electric power (gas model)	Kw	1,94	1,94	1,94			
<b>CONNECTIONS</b>		<b>ELECTRICAL</b>	<b>GAS</b>	<b>ELECTRICAL</b>	<b>GAS</b>	<b>ELECTRICAL</b>	<b>GAS</b>
Tension 230V - I + N + T	N° x mm2 / A	-	3x1,5 / 20A	-	3x1,5 / 20A	-	3x1,5 / 20A
Tension 230V - III + T	N° x mm2 / A	4x25 / 80A	3x1,5 / 20A	4x25 / 80A	3x1,5 / 20A	4x25 / 80A	3x1,5 / 20A
Tension 400V - III + N + T	N° x mm2 / A	5x10 / 40	3x1,5 / 20A	5x10 / 40	3x1,5 / 20A	5x10 / 40	3x1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"		1/2"	
<b>DIMENSIONS / PACKING DIMENSIONS</b>							
Net width / Gross width	mm	785 / 865		785 / 865		785 / 865	
Net Depth / Gross Depth	mm	1443 / 1457		1443 / 1457		1443 / 1457	
Net Height / Gross Height	mm	1980 / 2126		1980 / 2126		1980 / 2126	
Net weight / Gross weight	Kg	320 / 349		320 / 349		320 / 349	
<b>OTHERS</b>							
Max airflow	m3/h	750x2		750x2		750 x 2	
Ø Fume exhaust	mm	200x2		200x2		200x2	
Sound level	dB	64		64		64	

\* It may vary depending on the type of heating, filter cleanliness or extraction type

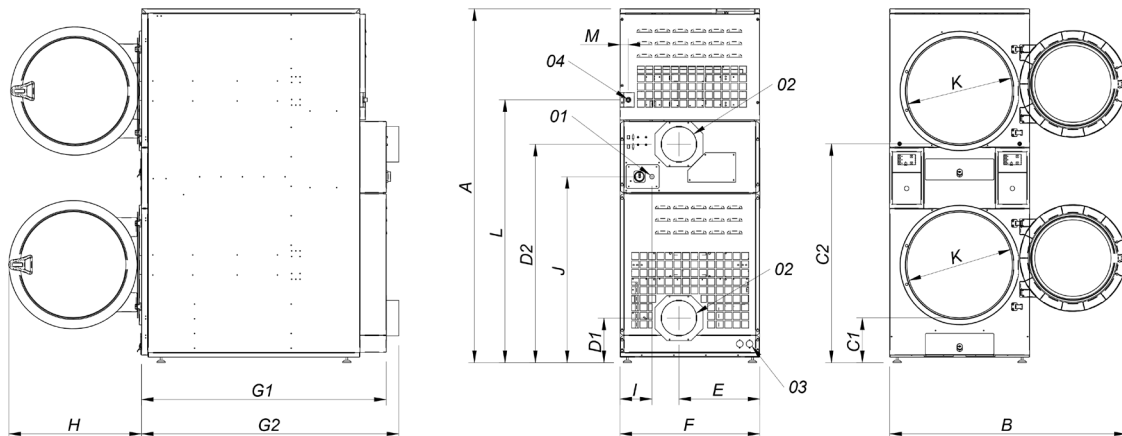

- 01 ELECTRIC CONNECTION
- 02 2 FUMES OUTPUT Ø200
- 03 2 SPRINKLER VALVES 3/4"
- 04 GAS INLET 1/2"
- 05 ETHERNET CONNECTION (ONLY TOUCH CONTROL)

	A	B	C1	C2	D1	D2	E	F	G1	G2	H	I	J	K	L	M
SR-2-18 TP2 POWERED	1980	1447	259	1234	250	1223	454	785	1374	1443	735	180	1017	575	1472	45
SR-2-18 M POWERED	1980	1447	259	1234	250	1223	454	785	1374	1443	735	180	1017	575	1472	45
SC-2-18 M POWERED	1980	1447	259	1234	250	1223	454	785	1374	1443	735	180	1017	575	1472	45



# DRYING

## STACK DRYERS ECONOMIC LINE SC-2-11/14/18 M

### CHARACTERISTICS

#### M PROGRAMMER

- New M programmer: push buttons to control temperature and time.

#### OUTSTANDING FEATURES

- Reversing drum action as standard.
- Frequency inverter as standard.
- Galvanized drum as standard.

#### VERSATILITY

- Make to order - customisation.
- OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses.

#### ERGONOMICS

- Drawer as fluff filter, made of stainless steel.
- Biggest door diameters.

#### MAINTENANCE


- Hinged panel: easy and ergonomic access.
- Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance with M console.

#### OTHERS


- COOL DOWN - anti-wrinkle at the end of the cycle.
- Heating options: electric, gas and steam.
- CE approved.

### OPTIONS

- M programmer display.
- Fluff filter with grid 0,3 mm (standard STACK is 0,6 mm).
- Maritime wooden packaging.
- Ship voltage for electric models: 440V III 50/60 Hz No neutral.
- Other voltages available.

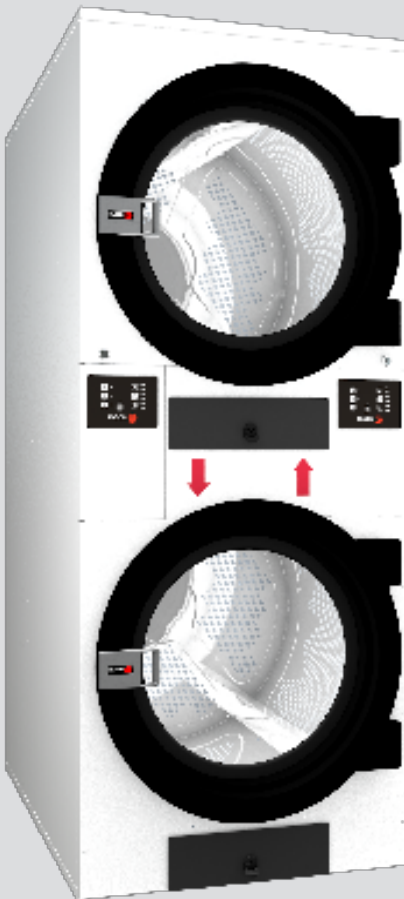

	UNIT.	SC-2-11 M	SC-2-14 M	SC-2-18 M			
<b>CAPACITY</b>							
Capacity 1/18	Kg	24	30	36			
Capacity 1/20	Kg	22	28	34			
Hourly Output (electr. // gas)	Kg/h	31,6 // 30,6	34,4 // 33,8	36,2 // 36			
Evaporation capacity (electr. // gas)	l/h	15,8 // 15,3	17,2 // 16,9	18,1 // 18			
<b>DRUM</b>							
Ø Drum	mm	750	750	750			
Ø Door	mm	574	574	574			
Door center height	mm	547/1.522	547/1.522	547/1.522			
Load hole bottom height	mm	260/1.235	260/1.235	260/1.235			
Drum length	mm	475	610	746			
Drum volume	l	210	269	330			
<b>POWER</b>							
Drum motor power	Kw	0,37x2	0,37x2	0,37x2			
Fan motor power	Kw	0,25x2	0,25x2	0,25x2			
Electric heating power	Kw	12x2	12x2	12x2			
Total electric power (elec.model)	Kw	25,34	25,34	25,34			
Gas heating power	Kw	12x2	12x2	12x2			
Instant propane gas consumption (G31)	Kg/h	1,03 x 2	1,03 x 2	1,03 x 2			
Instant natural gas consumption (G20)	m3/h	1,27 x 2	1,27 x 2	1,27 x 2			
Total electric power (gas model)	Kw	1,34	1,34	1,34			
<b>CONNECTIONS</b>		<b>ELECTRIC.</b>	<b>GAS</b>	<b>ELECTRIC.</b>	<b>GAS</b>	<b>ELECTRIC.</b>	<b>GAS</b>
Tension 230V - I + N + T	N° x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A		3 x 1,5 / 20A
Tension 230V - III + T	N° x mm2 / A	4 x 25 / 80A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A
Tension 400V - III + N + T	N° x mm2 / A	5 x 10 / 40A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"		1/2"	
<b>DIMENSIONS / PACKING DIMENSIONS</b>							
Net width / Gross width	mm	785 / 865		785 / 865		785 / 865	
Net Depth / Gross Depth	mm	972 / 1.055		1.106 / 1.189		1.242 / 1.325	
Net Height / Gross Height	mm	1.980 / 2.126		1.980 / 2.126		1.980 / 2.126	
Net weight / Gross weight	Kg	260 / 268		275 / 293		290 / 317	
<b>OTHERS</b>							
Max airflow	m3/h	500x2		500x2		500x2	
Ø Fume exhaust	mm	200		200		200	
Sound level	dB	64		64		64	

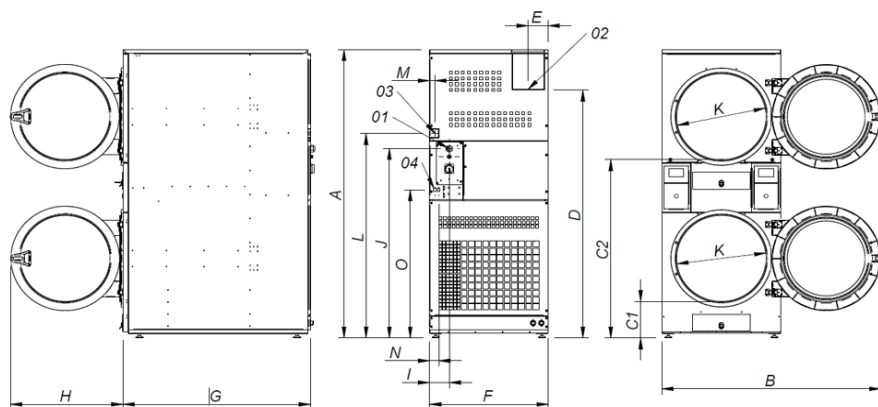

01 ELECTRIC CONNECTION  
02 FUMES OUTPUT Ø200  
03 GAS INLET 1/2"  
04 ETHERNET CONNECTION  
(ONLY TOUCH CONTROL)

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O
SC-2-11 M	1980	1447	259	1234	1680	135	785	972	735	130	1275	575	1406	35	60	1080
SC-2-14 M	1980	1447	259	1234	1680	135	785	1106	735	130	1275	575	1406	35	60	1080
SC-2-18 M	1980	1447	259	1234	1680	135	785	1242	735	130	1275	575	1406	35	60	1080