




DRYING SINGLE POCKET DRYERS ECONOMIC LINE FED-25MG

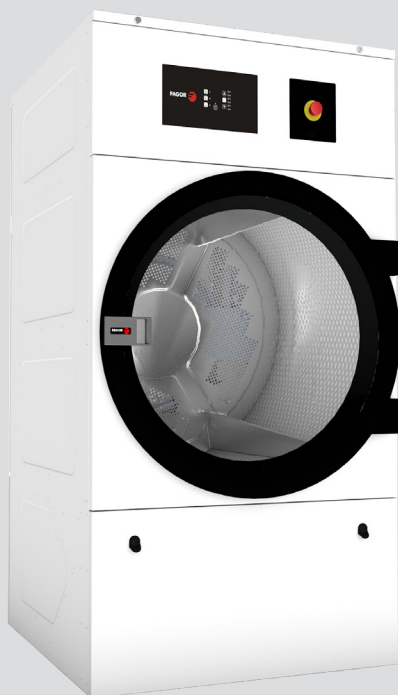

CHARACTERISTICS

M PROGRAMMER

- M programmer: push buttons to control temperature and time.

OUTSTANDING FEATURES

- Reversing drum action is standard.
- Frequency inverter is standard.
- Galvanized drum is standard.

EFFICIENCY

- Big Lint filter.

VERSATILITY

- Make to order - customization.
- OPL > OPL - Standard OPL model easily transformable to coin laundry uses.

ERGONOMICS

- Large Loading Doors.

MAINTENANCE

- Hinged panel: easy and ergonomic access
- Technical menu: statistics for technicians.
- Easy to access to components.

OTHERS


- White painted panels.
- Anti-wrinkle at the end of the cycle.
- Heating options: natural gas and propane.
- CE approved.

OPTIONS

- Opposite door opening.
- Back panel external air + filter.
- M programmer display

CAPACITY		
	U.	FD-25 MG
Capacity 1/18	Kg	11.7
	Lb	25.7
Capacity 1/20	Kg	10.5
	Lb	23.1
DRUM		
Ø Drum	mm	750
	inch	29.53
Drum length	mm	475
	inch	18.7
Drum volume	l cu	210
	ft	7.41
Ø Door	mm	574
	inch	22.6
Floor to door center	mm	976
	inch	38.43
Floor to lower part of the door	mm	618
	inch	24.33
Drum motor power	kW	0.37
ELECTRIC POWER		
Installed heating power	kW	12
Installed electrical power	kW	12.97
Evaporation capacity	l/h	9.3
	USgallon/h	2.46
Hourly output	Kg/h	20.3
	Lb/h	44.8
GAS POWER		
Installed heating power gas	Kcal/h	17638
	Btu/h	70000
Installed heating power gas	kW	20.51
Installed electrical power	kW	0.67
Instant propane gas consumption (G31)	Kg/h	1.76
	Lb/h	3.88
Instant natural gas consumption (G20)	m³/h	2.17
	cfm	1.28
Evaporation capacity	l/h	14.5
	USgallon/h	3.83
Hourly output Ø Gas inlet	Kg/h	28.6
	Lb/h	63.1
	BSPP ISO 228-1	1/2"
STEAM POWER		
Installed heating power steam	kW	30
	Btu/h	102364
Installed electrical power	kW	0.67
Steam consumption (8 barG) - Stándar	Kg/h	53
Steam consumption (116 psiG)	Lb/h	63.8
Steam pressure - Standard	barG	6 - 9
	psiG	87 - 130.5
Steam inlet - steam outlet - Standard	BSPT- ISO7.1	3/4"
Steam inlet - condensate outlet	NPT ANSI B1.20.1 Tapered	3/4"
Steam consumption (5 bagG) - Low pressure	Kg/h	57
Steam consumption (72.5 psiG) - Low pressure	Lb/h	68.7
Steam pressure - Low Pressure	barG	3 - 6
	psiG	43.5 - 87
Steam Inlet - Steam Outlet - Low Pressure	BSPT - ISO7.1	1"

VENTILATION			
Nominal air flow	m³/h	850	
	cfm	500.29	
Air outlet Ø	mm	200	
	inch	8	
Fan motor power	kW	0.25	
HEAT DISSIPATION			
Total max heat dissipation	kW	1.2	
	kW	4097	
Front pannel max heat dissipation	Btu/h	0.84	
	Btu/h	2867.9	
CONNECTIONS		ELECTRICAL	GAS
Voltage 120/60/1~ I + G	Nº x AWG / A	-	3 X 12 / 20 A
Voltage 230V - 3~ + G	-	-	-
Voltage 480V - 3~ + G	-	-	-
DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	mm	785 / 865	
	inch	30.91 / 34.06	
Net depth / Gross depth	mm	855 / 940	
	inch	33.6 / 37.01	
Net height / Gross height	mm	1694 / 1840	
	inch	66.69 / 72.44	
Net weight / Gross weight	Kg	172 / 180	
	Lb	379.2 / 396.83	
OTHERS			
Sound level	dB	64	

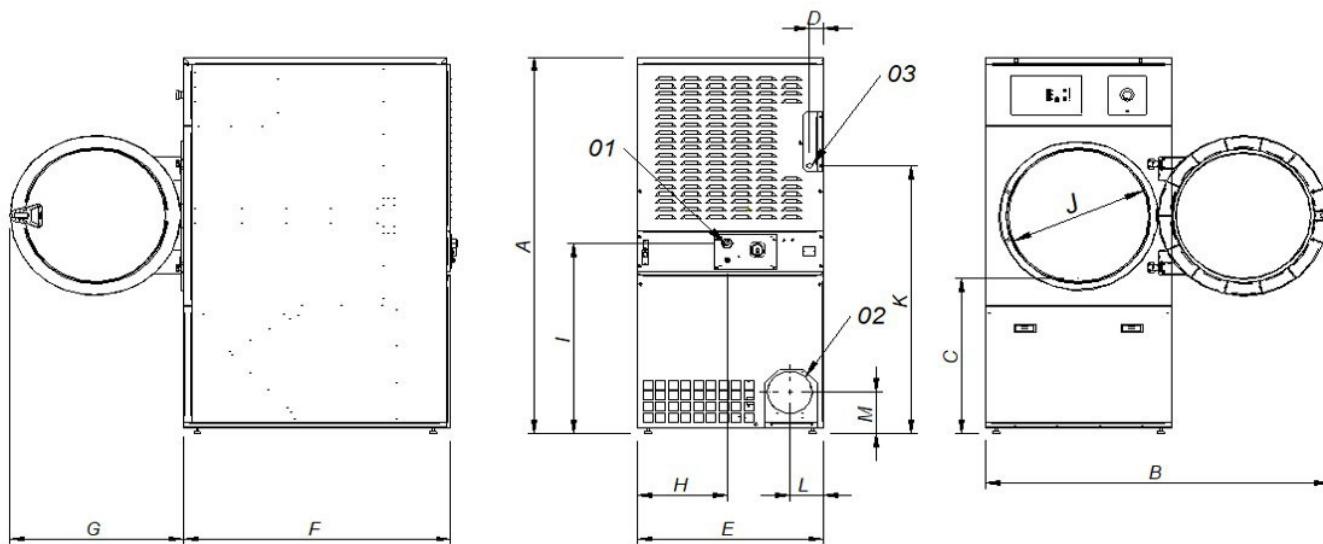


01. Power supply
02. Fumes output 8"
03. Gas inlet 1/2"

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
FD-25 MG	66.69	56.96	27.12	2.67	30.90	33.66	28.93	14.96	34.25	22.63	48.26	5.23	7.08	1.37	31.69



DRYING SINGLE POCKET DRYERS ECONOMIC LINE FED-30 MG

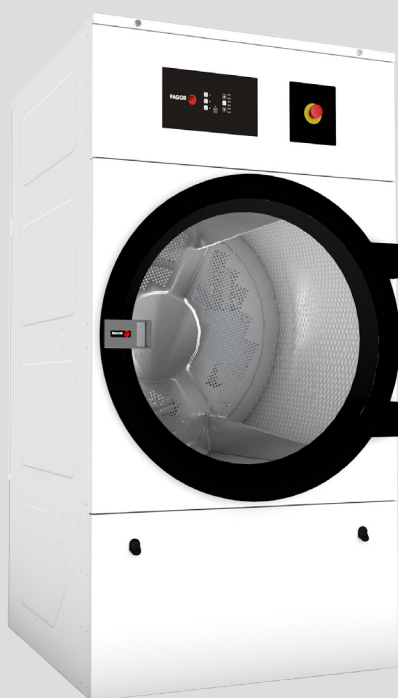

CHARACTERISTICS

M PROGRAMMER

- M programmer: push buttons to control temperature and time.

OUTSTANDING FEATURES

- Reversing drum action is standard.
- Frequency inverter is standard.
- Galvanized drum is standard.

EFFICIENCY

- Big Lint filter.

VERSATILITY

- Make to order - customization.
- OPL > OPL - Standard OPL model easily transformable to coin laundry uses.

ERGONOMICS

- Large Loading Doors.

MAINTENANCE

- Hinged panel: easy and ergonomic access
- Technical menu: statistics for technicians.
- Easy to access to components.

OTHERS


- White painted panels.
- Anti-wrinkle at the end of the cycle.
- Heating options: natural gas and propane.
- CE approved.

OPTIONS

- Opposite door opening.
- Back panel external air + filter.
- M programmer display

CAPACITY		
	U.	FED-30 MG
Capacity 1/18	Kg	15
	Lb	33.1
Capacity 1/20	Kg	13.5
	Lb	29.8
DRUM		
Ø Drum	mm	750
	inch	29.53
Drum length	mm	610
	inch	24.02
Drum volume	l cu	270
	ft	9.53
Ø Door	mm	574
	inch	22.6
Floor to door center	mm	976
	inch	38.43
Floor to lower part of the door	mm	689
	inch	27.13
Drum motor power	kW	0.37
ELECTRIC POWER		
Installed heating power	kW	18
Installed electrical power	kW	18.97
Evaporation capacity	l/h	13.5
	USgallon/h	3.6
Hourly output	Kg/h	26.9
	Lb/h	59.3
GAS POWER		
Installed heating power gas	Kcal/h	17638
	Btu/h	70000
Installed heating power gas	kW	20.51
Installed electrical power	kW	0.67
Instant propane gas consumption (G31)	Kg/h	1.76
	Lb/h	3.88
Instant natural gas consumption (G20)	m³/h	2.17
	cfm	1.28
Evaporation capacity	l/h	15.4
	USgallon/h	4.068
Hourly output Ø Gas inlet	Kg/h	30.3
	Lb/h	66.7
	BSPP ISO 228-1	1/2"
STEAM POWER		
Installed heating power steam	kW	30
	Btu/h	102364
Installed electrical power	kW	0.67
Steam consumption (8 barG) - Stándar	Kg/h	53
Steam consumption (116 psiG)	Lb/h	63.8
Steam pressure - Standard	barG	6 - 9
	psiG	87 - 130.5
Steam inlet - steam outlet - Standard	BSPT- ISO7.1	3/4"
Steam inlet - condensate outlet	NPT ANSI B1.20.1 Tapered	3/4"
Steam consumption (5 bagG) - Low pressure	Kg/h	57
Steam consumption (72.5 psiG) - Low pressure	Lb/h	68.7
Steam pressure - Low Pressure	barG	3 - 6
	psiG	43.5 - 89
Steam Inlet - Steam Outlet - Low Pressure	BSPT - ISO7.1	1"

VENTILATION			
Nominal air flow	m³/h	850	
	cfm	500.29	
Air outlet Ø	mm	200	
	inch	8	
Fan motor power	kW	0.25	
HEAT DISSIPATION			
Total max heat dissipation	kW	1.8	
	kW	6145.5	
Front pannel max heat dissipation	Btu/h	1.26	
	Btu/h	4301.8	
CONNECTIONS		ELECTRICAL	GAS
Voltage 120/60/1~ + G	Nº x AWG / A	-	3 X 12 / 20 A
Voltage 230V/3~ + G	-	-	-
Voltage 480V/3 ~ + G	-	-	-
DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	mm	785 / 865	
	inch	30.91 / 34.06	
Net depth / Gross depth	mm	989 / 1074	
	inch	38.94 / 42.28	
Net height / Gross height	mm	1694 / 1840	
	inch	66.69 / 72.44	
Net weight / Gross weight	Kg	180 / 190	
	Lb	396.83 / 418.88	
OTHERS			
Sound level	dB	64	

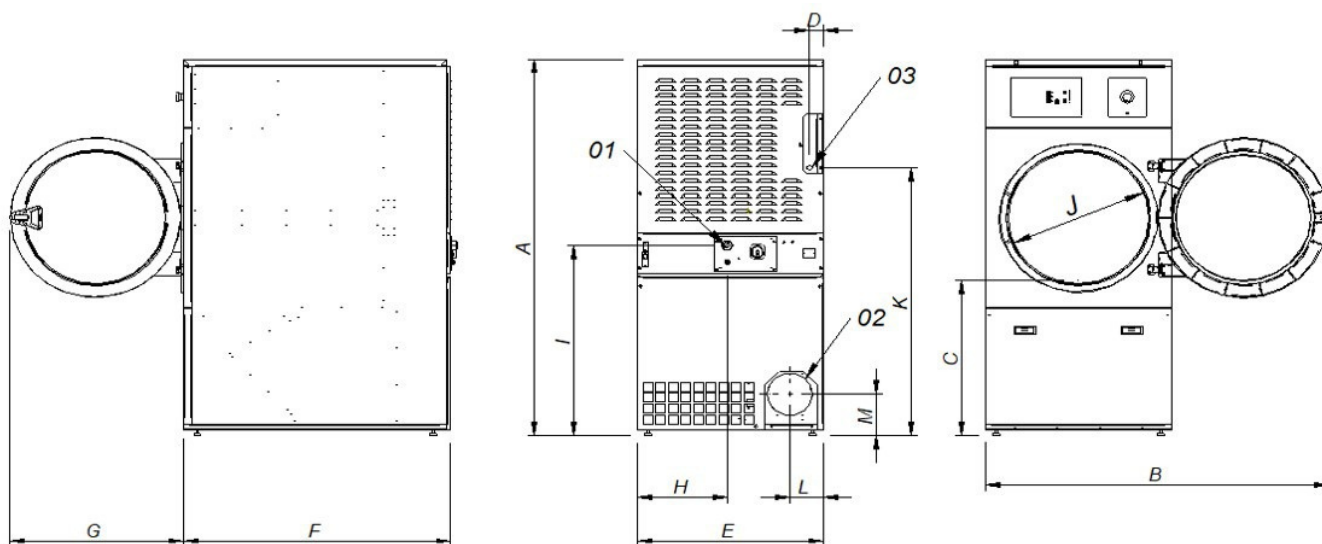


01. Power supply
02. Fumes output 8"
03. Gas inlet 1/2"

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
FED-30 MG	66.69	56.96	27.12	2.67	30.90	39.93	28.93	14.96	34.25	22.63	48.26	5.23	7.08	1.37	31.69



DRYING SINGLE POCKET DRYERS ECONOMIC LINE FED-35 MG

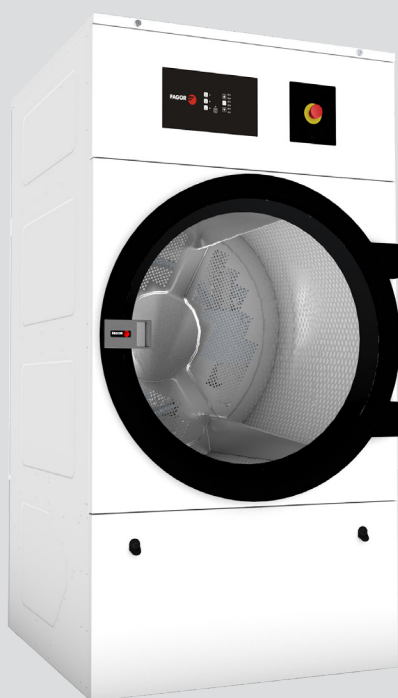

CHARACTERISTICS

M PROGRAMMER

- M programmer: push buttons to control temperature and time.

OUTSTANDING FEATURES

- Reversing drum action is standard.
- Frequency inverter is standard.
- Galvanized drum is standard.

EFFICIENCY

- Big Lint filter.

VERSATILITY

- Make to order - customization.
- OPL > OPL - Standard OPL model easily transformable to coin laundry uses.

ERGONOMICS

- Large Loading Doors.

MAINTENANCE

- Hinged panel: easy and ergonomic access
- Technical menu: statistics for technicians.
- Easy to access to components.

OTHERS


- White painted panels.
- Anti-wrinkle at the end of the cycle.
- Heating options: natural gas and propane.
- CE approved.

OPTIONS

- Opposite door opening.
- Back panel external air + filter.
- M programmer display

CAPACITY		
	U.	FED-35 MG
Capacity 1/18	Kg	18.3
	Lb	40.4
Capacity 1/20	Kg	16.5
	Lb	36.3
DRUM		
Ø Drum	mm	750
	inch	29.53
Drum length	mm	746
	inch	29.37
Drum volume	l cu	330
	ft	11.64
Ø Door	mm	574
	inch	22.6
Floor to door center	mm	976
	inch	38.43
Floor to lower part of the door	mm	618
	inch	24.33
Drum motor power	kW	0.37
ELECTRIC POWER		
Installed heating power	kW	18
Installed electrical power	kW	18.97
Evaporation capacity	l/h	14.10
	USgallon/h	3.72
Hourly output	Kg/h	28.3
	Lb/h	62.4
GAS POWER		
Installed heating power gas	Kcal/h	17638
	Btu/h	70000
Installed heating power gas	kW	20.51
Installed electrical power	kW	0.67
Instant propane gas consumption (G31)	Kg/h	1.76
	Lb/h	3.88
Instant natural gas consumption (G20)	m³/h	2.17
	cfm	1.28
Evaporation capacity	l/h	16.3
	USgallon/h	4.306
Hourly output Ø Gas inlet	Kg/h	31.9
	Lb/h	70.3
	BSPP ISO 228-1	1/2"
STEAM POWER		
Installed heating power steam	kW	30
	Btu/h	102364
Installed electrical power	kW	0.67
Steam consumption (8 barG) - Stándar	Kg/h	53
Steam consumption (116 psiG)	Lb/h	63.8
Steam pressure - Standard	barG	6 - 9
	psiG	87 - 130.5
Steam inlet - steam outlet - Standard	BSPT- ISO7.1	3/4"
Steam inlet - condensate outlet	NPT ANSI B1.20.1 Tapered	3/4"
Steam consumption (5 bagG) - Low pressure	Kg/h	57
Steam consumption (72.5 psiG) - Low pressure	Lb/h	68.7
Steam pressure - Low Pressure	barG	3 - 6
	psiG	43.5 - 91
Steam Inlet - Steam Outlet - Low Pressure	BSPT - ISO7.1	1"

VENTILATION			
Nominal air flow	m³/h	850	
	cfm	500.29	
Air outlet Ø	mm	200	
	inch	8	
Fan motor power	kW	0.25	
HEAT DISSIPATION			
Total max heat dissipation	kW	1.8	
	kW	6145.5	
Front pannel max heat dissipation	Btu/h	1.26	
	Btu/h	4301.8	
CONNECTIONS		ELECTRICAL	GAS
Voltage 120/60/1~ + G	Nº x AWG / A	-	3 X 12 /20 A
Voltage 230V/3~ + G	-	-	-
Voltage 480V/3 ~ + G	-	-	-
DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	mm	785 / 865	
	inch	30.91 / 34.06	
Net depth / Gross depth	mm	1125 / 1210	
	inch	44.29 / 47.64	
Net height / Gross height	mm	1694 / 1840	
	inch	66.69 / 72.44	
Net weight / Gross weight	Kg	187 / 200	
	Lb	412.26 / 440.92	
OTHERS			
Sound level	dB	64	

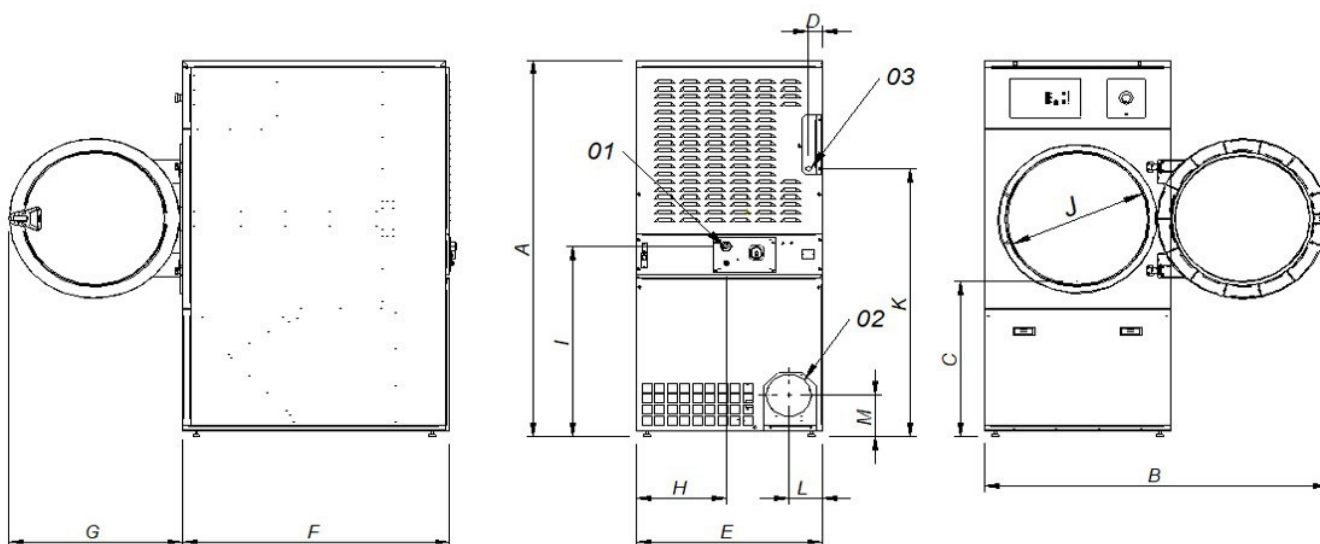


01. Power supply
02. Fumes output 8"
03. Gas inlet 1/2"

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
FED-35 MG	66.69	56.96	27.12	2.67	30.90	44.29	28.93	14.96	34.25	22.63	48.26	5.23	7.08	1.37	31.69



DRYING SINGLE POCKET DRYERS ECONOMIC LINE FED-50 MG

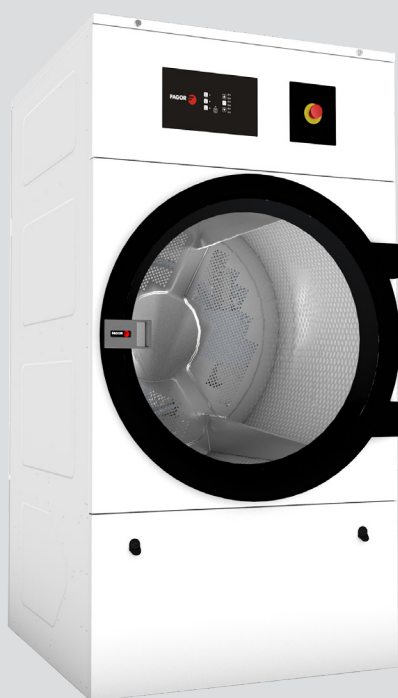

CHARACTERISTICS

M PROGRAMMER

- M programmer: push buttons to control temperature and time.

OUTSTANDING FEATURES

- Reversing drum action is standard.
- Frequency inverter is standard.
- Galvanized drum is standard.

EFFICIENCY

- Big Lint filter.

VERSATILITY

- Make to order - customization.
- OPL > OPL - Standard OPL model easily transformable to coin laundry uses.

ERGONOMICS

- Large Loading Doors.

MAINTENANCE

- Hinged panel: easy and ergonomic access
- Technical menu: statistics for technicians.
- Easy to access to components.

OTHERS


- White painted panels.
- Anti-wrinkle at the end of the cycle.
- Heating options: natural gas and propane.
- CE approved.

OPTIONS

- Opposite door opening.
- Back panel external air + filter.
- M programmer display

CAPACITY		
	U.	FED-50 MG
Capacity 1/18	Kg	24.3
	Lb	53.9
Capacity 1/20	Kg	22
	Lb	48.5
DRUM		
Ø Drum	mm	835
	inch	32.87
Drum length	mm	800
	inch	31.5
Drum volume	l cu	440
	ft	15.54
Ø Door	mm	574
	inch	22.6
Floor to door center	mm	1030
	inch	40.55
Floor to lower part of the door	mm	672
	inch	26.46
Drum motor power	kW	0.37
ELECTRIC POWER		
Installed heating power	kW	24
Installed electrical power	kW	24.97
Evaporation capacity	l/h	17
	USgallon/h	4.5
Hourly output	Kg/h	34
	Lb/h	75
GAS POWER		
Installed heating power gas	Kcal/h	26655
	Btu/h	105775.6
Installed heating power gas	kW	31
Installed electrical power	kW	0.97
Instant propane gas consumption (G31)	Kg/h	2.66
	Lb/h	5.86
Instant natural gas consumption (G20)	m³/h	3.28
	cfm	1.93
Evaporation capacity	l/h	20
	USgallon/h	5.283
Hourly output Ø Gas inlet	Kg/h	40
	Lb/h	88.2
	BSPP ISO 228-1	1/2"
STEAM POWER		
Installed heating power steam	kW	49.2
	Btu/h	167877
Installed electrical power	kW	0.97
Steam consumption (8 barG) - Stándar	Kg/h	87
Steam consumption (116 psiG)	Lb/h	104.8
Steam pressure - Standard	barG	6 - 9
	psiG	87 - 130.5
Steam inlet - steam outlet - Standard	BSPT- ISO7.1	1"
Steam inlet - condensate outlet	NPT ANSI B1.20.1 Tapered	1"
Steam consumption (5 bagG) - Low pressure	Kg/h	-
Steam consumption (72.5 psiG) - Low pressure	Lb/h	-
Steam pressure - Low Pressure	barG	3 - 6
	psiG	43.5 - 93
Steam Inlet - Steam Outlet - Low Pressure	BSPT - ISO7.1	1"

VENTILATION			
Nominal air flow	m³/h	200	
	cfm	706.29	
Air outlet Ø	mm	200	
	inch	8	
Fan motor power	kW	0.55	
HEAT DISSIPATION			
Total max heat dissipation	kW	2.4	
	kW	8193.9	
Front pannel max heat dissipation	Btu/h	1.68	
	Btu/h	5735.8	
CONNECTIONS		ELECTRICAL	GAS
Voltage 120/60/1~ + G	Nº x AWG / A	-	3 X 12 /20 A
Voltage 230V/3~ + G	-	-	-
Voltage 480V/3 ~ + G	-	-	-
DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	mm	890 / 970	
	inch	35.04 / 38.19	
Net depth / Gross depth	mm	1255 / 1345	
	inch	49.41 / 52.95	
Net height / Gross height	mm	1812 / 1940	
	inch	71.34 / 76.38	
Net weight / Gross weight	Kg	210 / 230	
	Lb	462.97 / 507.06	
OTHERS			
Sound level	dB	65	

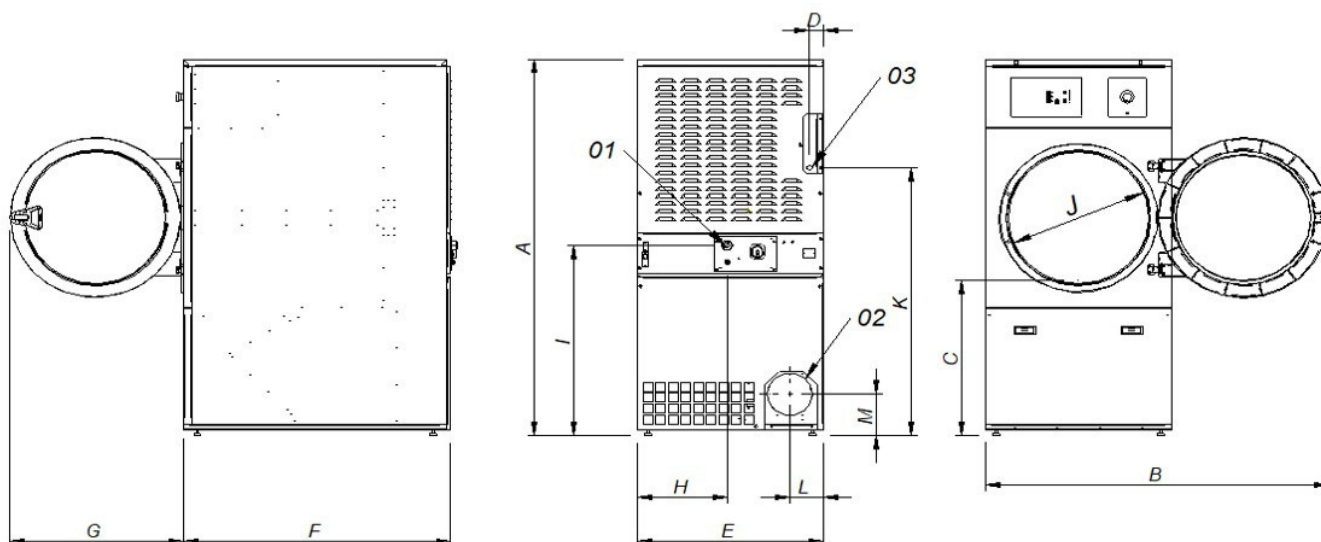


01. Power supply
02. Fumes output 8"
03. Gas inlet 1/2"

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
FED-50 MG	71.33	61.10	29.25	4.40	35.03	49.40	28.93	4.21	36.22	22.63	52.91	9.37	7.08	1.45	33.85



DRYING SINGLE POCKET DRYERS ECONOMIC LINE FED-65 MG

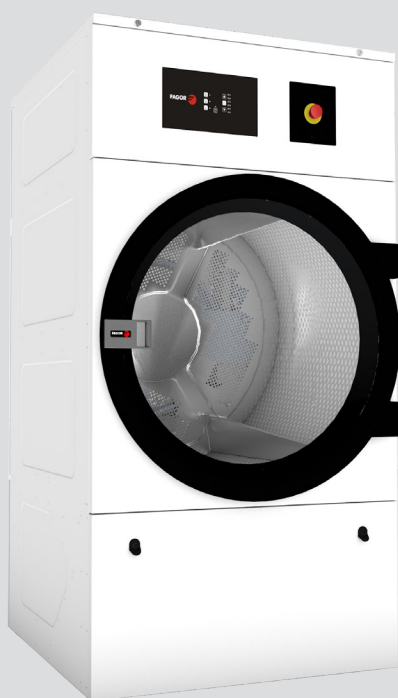

CHARACTERISTICS

M PROGRAMMER

- M programmer: push buttons to control temperature and time.

OUTSTANDING FEATURES

- Reversing drum action is standard.
- Frequency inverter is standard.
- Galvanized drum is standard.

EFFICIENCY

- Big Lint filter.

VERSATILITY

- Make to order - customization.
- OPL > OPL - Standard OPL model easily transformable to coin laundry uses.

ERGONOMICS

- Large Loading Doors.

MAINTENANCE

- Hinged panel: easy and ergonomic access
- Technical menu: statistics for technicians.
- Easy to access to components.

OTHERS


- White painted panels.
- Anti-wrinkle at the end of the cycle.
- Heating options: natural gas and propane.
- CE approved.

OPTIONS

- Opposite door opening.
- Back panel external air + filter.
- M programmer display

CAPACITY		
	U.	FED-65 MG
Capacity 1/18	Kg	30.6
	Lb	67.3
Capacity 1/20	Kg	27.5
	Lb	60.6
DRUM		
Ø Drum	mm	947
	inch	37.28
Drum length	mm	780
	inch	30.71
Drum volume	l cu	550
	ft	19.42
Ø Door	mm	802
	inch	31.57
Floor to door center	mm	1040
	inch	40.94
Floor to lower part of the door	mm	578
	inch	22.74
Drum motor power	kW	0.55
ELECTRIC POWER		
Installed heating power	kW	30
Installed electrical power	kW	31.15
Evaporation capacity	l/h	26.1
	USgallon/h	6.9
Hourly output	Kg/h	48.4
	Lb/h	106.7
GAS POWER		
Installed heating power gas	Kcal/h	35276
	Btu/h	139986.5
Installed heating power gas	kW	41
Installed electrical power	kW	1.15
Instant propane gas consumption (G31)	Kg/h	3.51
	Lb/h	7.74
Instant natural gas consumption (G20)	m³/h	4.34
	cfm	2.55
Evaporation capacity	l/h	30.9
	USgallon/h	8.163
Hourly output Ø Gas inlet	Kg/h	59.3
	Lb/h	130.7
	BSPP ISO 228-1	1/2"
STEAM POWER		
Installed heating power steam	kW	50.1
	Btu/h	170948
Installed electrical power	kW	1.15
Steam consumption (8 barG) - Stándar	Kg/h	89
Steam consumption (116 psiG)	Lb/h	107.2
Steam pressure - Standard	barG	6 - 9
	psiG	87 - 130.5
Steam inlet - steam outlet - Standard	BSPT- ISO7.1	1"
Steam inlet - condensate outlet	NPT ANSI B1.20.1 Tapered	1"
Steam consumption (5 bagG) - Low pressure	Kg/h	93
Steam consumption (72.5 psiG) - Low pressure	Lb/h	112
Steam pressure - Low Pressure	barG	3 - 6
	psiG	43.5 - 95 1
Steam Inlet - Steam Outlet - Low Pressure	BSPT - ISO7.1	1/2"

VENTILATION			
Nominal air flow	m³/h	1200	
	cfm	706.29	
Air outlet Ø	mm	200	
	inch	8	
Fan motor power	kW	0.55	
HEAT DISSIPATION			
Total max heat dissipation	kW	3	
	kW	10242.4	
Front pannel max heat dissipation	Btu/h	2.1	
	Btu/h	7169.7	
CONNECTIONS		ELECTRICAL	GAS
Voltage 120/60/1~ + G	Nº x AWG / A	-	3 X 12 /20 A
Voltage 230V/3~ + G	-	-	-
Voltage 480V/3 ~ + G	-	-	-
DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	mm	985 / 1065	
	inch	38.78 / 41.93	
Net depth / Gross depth	mm	1054 / 1154	
	inch	41.5 / 45.43	
Net height / Gross height	mm	1975 / 2080	
	inch	77.76 / 81.89	
Net weight / Gross weight	Kg	77.76 / 81,89	
	Lb	230 / 260	
OTHERS			
Sound level	dB	65	

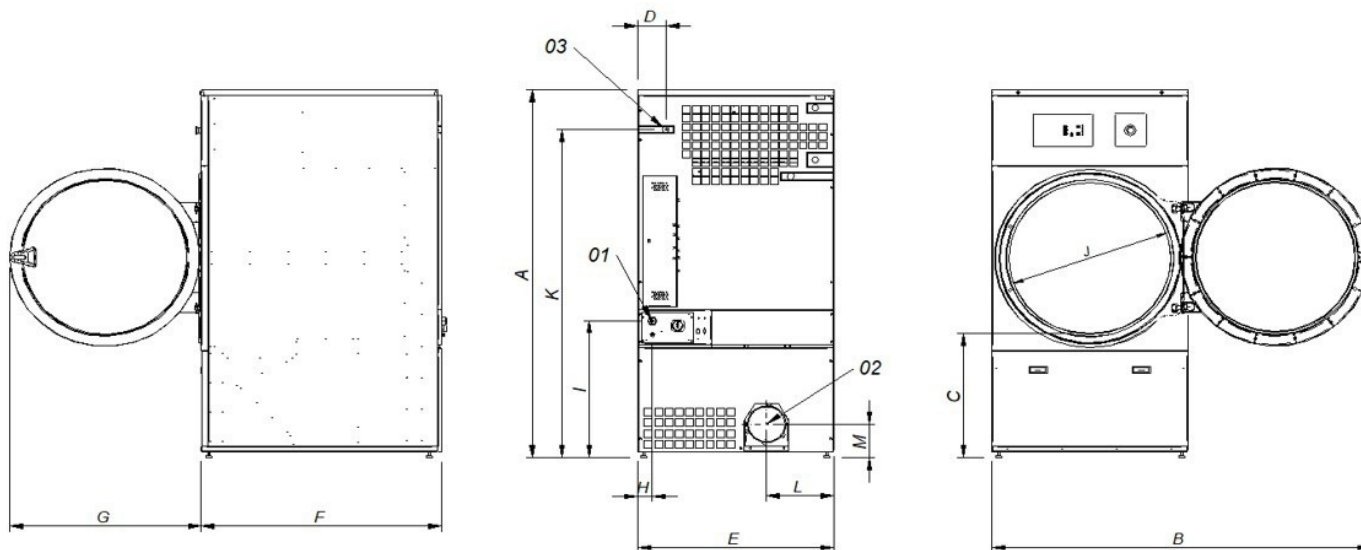

01. Power supply
02. Fumes output 8"
03. Gas inlet 1/2"

	A	B	C	D	E	F	G	H	I	J	K	L	M
FED-65 MG	77.75	75.19	25.98	5.55	38.77	41.49	38.18	2.75	28.74	31.57	69.60	13.26	7.00



DRYING SINGLE POCKET DRYERS ECONOMIC LINE FED-80 MG



CHARACTERISTICS

M PROGRAMMER

- M programmer: push buttons to control temperature and time.

OUTSTANDING FEATURES

- Reversing drum action is standard.
- Frequency inverter is standard.
- Galvanized drum is standard.

EFFICIENCY

- Big Lint filter.

VERSATILITY

- Make to order - customization.
- OPL > OPL - Standard OPL model easily transformable to coin laundry uses.

ERGONOMICS

- Large Loading Doors.

MAINTENANCE

- Hinged panel: easy and ergonomic access
- Technical menu: statistics for technicians.
- Easy to access to components.

OTHERS


- White painted panels.
- Anti-wrinkle at the end of the cycle.
- Heating options: natural gas and propane.
- CE approved.

OPTIONS

- Opposite door opening.
- Back panel external air + filter.
- M programmer display

CAPACITY		
	U.	FED-80 MG
Capacity 1/18	Kg	36.7
	Lb	80.8
Capacity 1/20	Kg	33
	Lb	72.8
DRUM		
Ø Drum	mm	947
	inch	37.28
Drum length	mm	936
	inch	36.85
Drum volume	l cu	660
	ft	23.3
Ø Door	mm	802
	inch	31.57
Floor to door center	mm	1040
	inch	40.94
Floor to lower part of the door	mm	578
	inch	22.74
Drum motor power	kW	0.55
ELECTRIC POWER		
Installed heating power	kW	36
Installed electrical power	kW	37.15
Evaporation capacity	l/h	31.1
	USgallon/h	8.2
Hourly output	Kg/h	60
	Lb/h	132.3
GAS POWER		
Installed heating power gas	Kcal/h	35276
	Btu/h	139986.5
Installed heating power gas	kW	41
Installed electrical power	kW	1.15
Instant propane gas consumption (G31)	Kg/h	3.51
	Lb/h	7.74
Instant natural gas consumption (G20)	m³/h	4.34
	cfm	2.55
Evaporation capacity	l/h	32.1
	USgallon/h	8.480
Hourly output Ø Gas inlet	Kg/h	63.9
	Lb/h	140.9
	BSPP ISO 228-1	1/2"
STEAM POWER		
Installed heating power steam	kW	50.1
	Btu/h	170948
Installed electrical power	kW	1.15
Steam consumption (8 barG) - Stándar	Kg/h	89
Steam consumption (116 psiG)	Lb/h	107.2
Steam pressure - Standard	barG	6 - 9
	psiG	87 - 130.5
Steam inlet - steam outlet - Standard	BSPT- ISO7.1	1"
Steam inlet - condensate outlet	NPT ANSI B1.20.1 Tapered	1"
Steam consumption (5 bagG) - Low pressure	Kg/h	93
Steam consumption (72.5 psiG) - Low pressure	Lb/h	112
Steam pressure - Low Pressure	barG	3 - 6
	psiG	43.5 - 97
Steam Inlet - Steam Outlet - Low Pressure	BSPT - ISO7.1	1 1/2"

VENTILATION			
Nominal air flow	m³/h	1200	
	cfm	706.29	
Air outlet Ø	mm	200	
	inch	8	
Fan motor power	kW	0.55	
HEAT DISSIPATION			
Total max heat dissipation	kW	3.6	
	kW	12290.9	
Front pannel max heat dissipation	Btu/h	2.52	
	Btu/h	8603.6	
CONNECTIONS		ELECTRICAL	GAS
Voltage 120/60/1~ + G	Nº x AWG / A	-	3 X 12 /20 A
Voltage 230V/3~ + G	-	-	-
Voltage 480V/3 ~ + G	-	-	-
DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	mm	985 / 1065	
	inch	38.78 / 41.93	
Net depth / Gross depth	mm	1210 / 1310	
	inch	47.64 / 51.57	
Net height / Gross height	mm	1975 / 2080	
	inch	77.76 / 81.89	
Net weight / Gross weight	Kg	260 / 285	
	Lb	573.20 / 628.32	
OTHERS			
Sound level	dB	65	

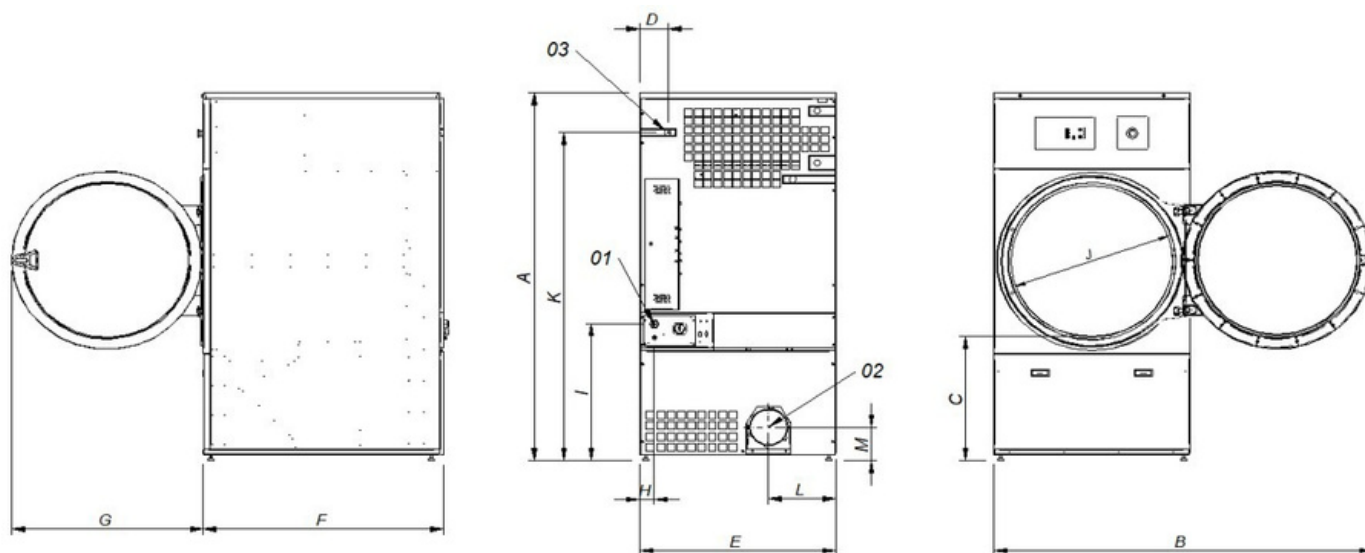

01. Power supply
02. Fumes output 8"
03. Gas inlet 1/2"

	A	B	C	D	E	F	G	H	I	J	K	L	M
FED-80 MG	77.75	75.19	25.98	5.55	38.77	47.63	38.18	2.75	28.74	31.57	69.60	13.26	7.00